Navaid Energy Private Limited




Need help? Call: +91 9999492721

Polyethylene Skirt Keel Buoys 3000

Specifications of Buoys (Guide line only)

| specifications of Buoys (Guide line only) | |
|---|---|
| Buoy Diameter | 3000mm |
| Body Thickness | 18mm (Float Section) |
| Overall Height | 7.2m |
| Focal Height | up to 5m |
| Draught | 1.9m |
| Weight without Mooring | 1900Kg (approx.) |
| Mooring Eyes | 2Nos |
| Lifting Hook | 2Nos |
| Super Structure | UV- Stabilized Polyethylene/ S.S Structure |
| Day-Mark (As per IALA) | Cardinal or Lateral Type |
| Recommended Chain | Dia-28mm |
| Radar Reflector | Optional (NR30/NR160) |
| Blast Weight Adjustable | 550Kg (approx.) |
| | |

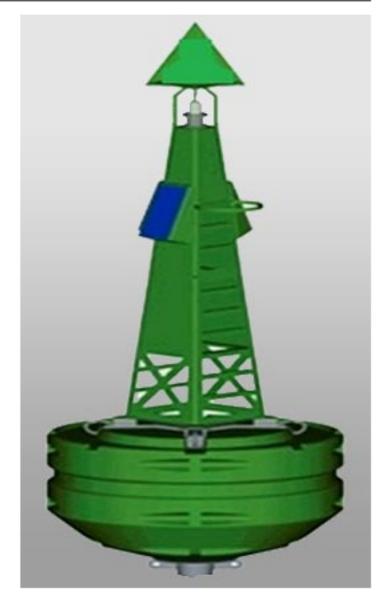

It is requested that the following particulars may please be furnished to enable us to make a proper study and offer advice in the matter.

- A Hydrographic chart/ Plan of the area in which the Buoys are proposed to be laid indicating the proposed location of the Buoys the depth of water etc.
- 2. The details of the current
- The nature of the holding ground / sea bottom at the various locations.
 - * Technical modification reserved without prior notice

Navaid Energy Private Limited